

## norament 975 LL

### General:

When processing the accessories, the processing instructions of the manufacturers and the information contained in the Ordinance on Hazardous Substances are to be observed. The basis of each floorcovering installation is the country-specific standards.

### A. Subfloor

All types of raised-access floors, screeds as well as chipboards, plywood etc. are suitable. The subfloor must comply with the requirements of the country-specific standards with regard to the readiness for installation. The subfloor must be permanently dry, free of cracks, level, pressure resistant and guarantee tensile strength and may not contain any dust or other separating substances such as paints, waxes, oils etc. In the nominal dimension range of 10 cm, a deviation of 1 mm may not be exceeded with regard to the plane (no short joints). Raised-floor elements, chipboards, plywood etc. must be installed at the same height. In case of renovations, the elements must be re-aligned, if required.

During the installation, the subfloor temperature has to be nearly steady and must range between **15°C** and **25°C**. **The floorcoverings must be laid out and acclimatised to the surface for at least 8 hours prior to fixing.**


### B. Material inspection

The colour and the batch identity (control number on the packaging label) of the floorcovering are to be checked. Notices of defects or material replacement are only possible if the goods are not yet installed. Additional ancillary costs cannot be assumed.


### C. Short-term installation

1. Suitable and film-forming primers such as Planus (Uzin Utz AG) and Thomsit R 766 (HenkelBautechnik) must be rolled on with a lambskin roller on absorbent subfloors such as e.g. chipboards, screeds etc.

(please observe manufacturer's specifications and drying times).

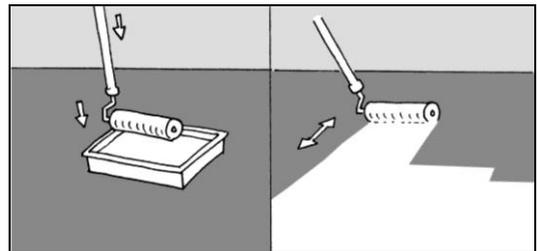



2. Affix nora Quickfix adhesive tape on the subfloor along the walls and along the connection and closing-off areas and rub on. Do not remove the cover paper from the adhesive side for the floorcovering!

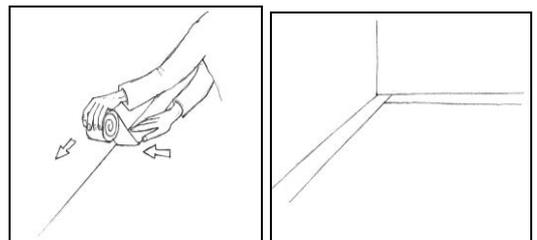

3. Affix nora Quickfix adhesive squares flush on the corners as well as on the floorcovering back. The adhesive side with the nora® logo is affixed pointing to the floorcovering back.

The nora Quickfix adhesive squares do not have to be affixed on all 4 corners in the case of edge sheets. (see item 2)

Do not remove the white cover paper from the adhesive side destined for the subfloor!


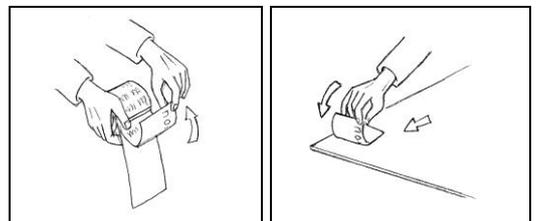


### C. Short-term installation

- Lay out the tiles in entire rooms or larger partial areas with cross joints, including cutting of the edge tiles, door connections, pipe fairleads etc.

Please observe the direction of the arrows on the tile back.

Acclimatise norament 975 LL tiles for at least 8 hours.






- If required, rework the edge sheets along the walls as well as along the connection and closing-off areas.

Slightly raise the corners of the norament 975 LL tiles individually one after the other, remove the white cover paper from the Quickfix adhesive squares and fix the corners.

For the edge sheets, also remove the cover paper of the nora Quickfix adhesive tape. The now visible adhesive side with nora® logo points again in the direction of the floorcovering back.

Press on firmly or tap on with a rubber mallet the adhesion areas.





### C. Long-term installation with a slip-resistant and tackifying dispersion



- Application of a suitable slip-resistant and tackifying dispersion such as e.g. UZIN U 1000 and Thomsit T 425. The applied quantity and the type of application depend on the product. Please observe manufacturer's specifications.

Important: In case of raised-access floors, no dispersion shall penetrate the joints of the elements. If required, mask the joint area.

The stability of the fixing can be varied by applying different drying times. Please observe manufacturer's specifications.

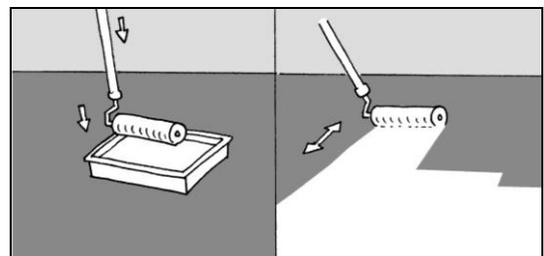

- Position the tiles after the desired drying time of the fixing agent and rub on or roll on.



## **E. Wall connection**

The connection to the wall is made using the skirting S 1023 / 1024 U with sealing lip.